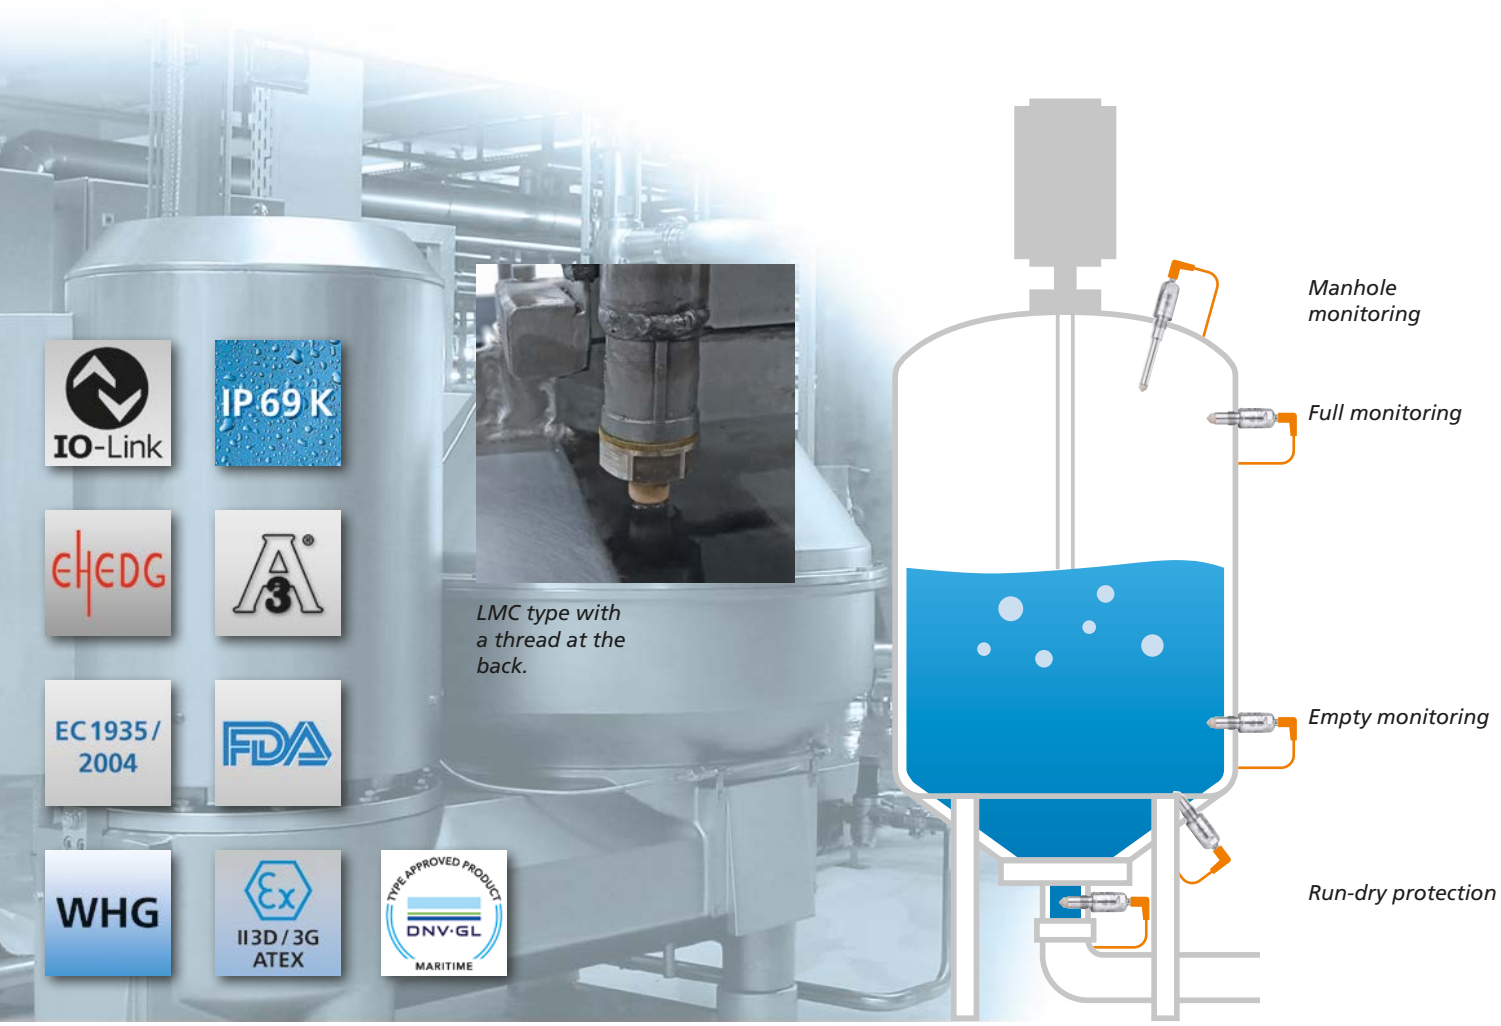


LMC type with a thread at the back.

Manhole monitoring

Full monitoring

Empty monitoring

Run-dry protection

LMT type level sensors

Flexible mounting thanks to orientation-independent installation.

Shock and vibration resistant in a robust stainless steel housing.

Hygienic approvals EHEDG, 3A and FDA.

Versions available as overflow prevention.

Complementary switching outputs.

Installation example LMT:

The E43414 adapter allows rear installation of sensors with customised installation lengths. The stainless steel adapter also provides a hygienic seal.



Process connection	Installation depth [mm]	Order no.	Order no.	Order no.
Approvals		Sanitary	WHG	ATEX
Preset to aqueous media				
G 1/2	11	**LMT100**	**LMT191**	
G 1/2	38	**LMT102**	**LMT192**	
G 1/2	153	**LMT104**	**LMT194**	
G 1/2	253	**LMT105**	**LMT195**	
G 3/4	28	**LMT202**	**LMT292**	
G 1	38	**LMT302**	**LMT392**	
Preset to oils, fats, powder				
G 1/2	11	**LMT110**		**LMT01A**
G 1/2	153			**LMT03A**
G 1/2	253			**LMT04A**
Preset to sugary media				
G 1/2	11	**LMT121**		

Example

